

403F-17

Industrial

U.S. EPA Tier 4 Final

17.8 kW / 23.9 hp @ 2200 - 2800 rpm

The 403F-17 is an indirect injection industrial diesel engine that meets the U.S. EPA Tier 4 Final emission standard without the need for electronic control, aftertreatment or exhaust gas recirculation. It is available with many factory configurable options to minimise the costs of machine development and of manufacturing.



Features and benefits

Reliable power

The Perkins® 400 Series has been proven to deliver durable power. Manufactured in highly automated, modern production facilities it offers both the choice of wide range of factory configurable options whilst preserving high quality levels.

Tailored for your machines

The 403F-17 is one of the available engine options from Perkins at 17.8 kW (23.9 hp) allowing OEMs to balance different installation, operating and commercial requirements. This model is particularly adapted to machines which need high torque, lower speed operation and cold start capability.

Quiet

The stiff block and indirect injection system make this a quiet engine, minimising operator fatigue and saving money for OEMs in sound attenuation measures.

Specification

Cylinders	3
Displacement, litres (in ³)	1.7 (108.4)
Aspiration	Naturally aspirated
Bore and stroke, mm (in)	84 × 100 (3.3 × 3.9)
Maximum torque, Nm (lb ft) @ rated speed, rpm	82.8 (61.1) @ 1800
Combustion system	Indirect injection
Compression ratio	23:01
Aftertreatment	N/A
Total lubricating oil capacity, litres (US gal)	5 (1.3)
Rotation (viewed from flywheel)	Anti - clockwise
Length x width x height, mm (in)	572 × 453 × 643 (23 × 18 × 25)
Weight, kg (lb)	Dry - 158 (348) Wet - 166 (366)

For more information please contact a Perkins distributor: <http://distributorlocator.perkins.com>

All information in this document is substantially correct at time of printing and may be altered subsequently.
Photographs are for illustrative purposes only and may not reflect final specification.
Final weight and dimensions will depend on completed specification.
Information subject to selected configuration, and subject to change without notice.
Engine power measured per ISO 14396:2002.
100595-EN-01 (07-26) Produced in England ©2026 Perkins Engines Company Limited



403F-17

Industrial



U.S. EPA Tier 4 Final

17.8 kW / 23.9 hp @ 2200 - 2800 rpm

Performance curves

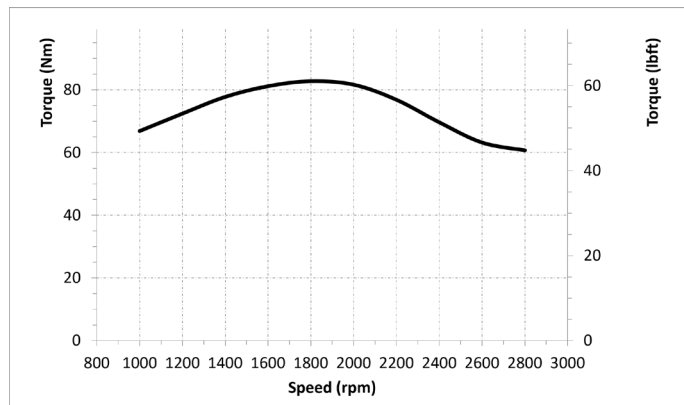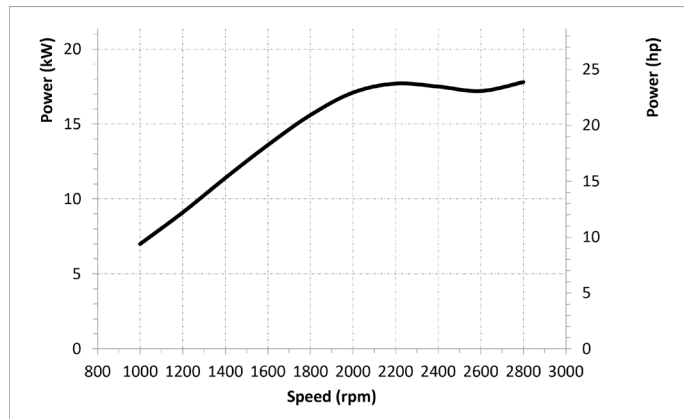

Dimensions

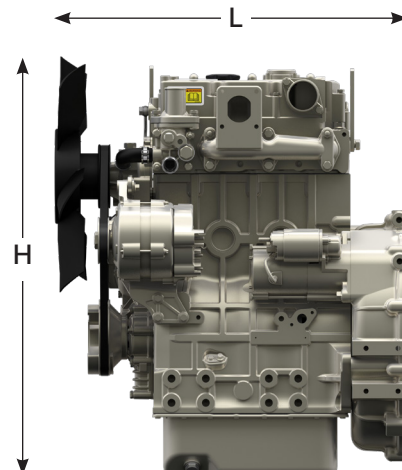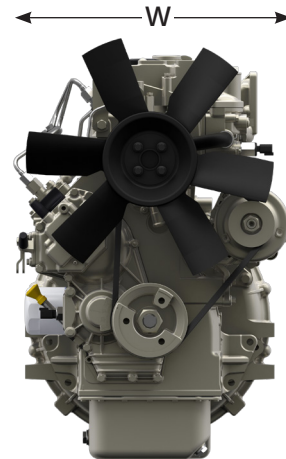

For more information please contact a Perkins distributor: <http://distributorlocator.perkins.com>

All information in this document is substantially correct at time of printing and may be altered subsequently.
Photographs are for illustrative purposes only and may not reflect final specification.
Final weight and dimensions will depend on completed specification.
Information subject to selected configuration, and subject to change without notice.
Engine power measured per ISO 14396:2002.
100595-EN-01 (07-26) Produced in England ©2026 Perkins Engines Company Limited